

# **goseq: Gene Ontology testing for RNA-seq datasets**

Matthew D. Young

Nadia Davidson

`nadia.davidson@mcri.edu.au`

Matthew J. Wakefield

Gordon K. Smyth

Alicia Oshlack

26 June 2014

## **1 Introduction**

This document gives an introduction to the use of the **goseq** R Bioconductor package [Young et al., 2010]. This package provides methods for performing Gene Ontology analysis of RNA-seq data, taking length bias into account [Oshlack and Wakefield, 2009]. The methods and software used by **goseq** are equally applicable to other category based test of RNA-seq data, such as KEGG pathway analysis.

Once installed, the **goseq** package can be easily loaded into R using:

```
> library(goseq)
```

In order to perform a GO analysis of your RNA-seq data, **goseq** only requires a simple named vector, which contains two pieces of information.

1. **Measured genes:** all genes for which RNA-seq data was gathered for your experiment. Each element of your vector should be named by a unique gene identifier.
2. **Differentially expressed genes:** each element of your vector should be either a 1 or a 0, where 1 indicates that the gene is differentially expressed and 0 that it is not.

If the organism, gene identifier or category test is currently not natively supported by **goseq**, it will also be necessary to supply additional information regarding the genes length and/or the association between categories and genes.

A combination of bioconductor R packages such as **GenomicFeatures** and **Rsamtools** allow for the summarization of mapped reads into a table of counts, such as reads per gene. From there, several packages exist for performing differential expression analysis on summarized data

(eg. `edgeR` [Robinson and Smyth, 2007, 2008, Robinson et al., 2010]). `goseq` will work with any method for determining differential expression and as such differential expression analysis is outside the scope of this document, but in order to facilitate ease of use, we will make use of the `edgeR` package to calculate differentially expressed (DE) genes in all the case studies in this document.

## 2 Reading data

We assume that the user can use appropriate in-built R functions (such as `read.table` or `scan`) to obtain two vectors, one containing all genes assayed in the RNA-seq experiment, the other containing all genes which are DE. If we assume that the vector of genes being assayed is named `assayed.genes` and the vector of DE genes is named `de.genes` we can construct a named vector suitable for use with `goseq` using the following:

```
> gene.vector=as.integer(assayed.genes%in%de.genes)
> names(gene.vector)=assayed.genes
> head(gene.vector)
```

It may be that the user can already read in a vector in this format, in which case it can then be immediately used by `goseq`.

## 3 GO testing of RNA-seq data

To begin the analysis, `goseq` first needs to quantify the length bias present in the dataset under consideration. This is done by calculating a Probability Weighting Function or PWF which can be thought of as a function which gives the probability that a gene will be differentially expressed (DE), based on its length alone. The PWF is calculated by fitting a monotonic spline to the binary data series of differential expression (1=DE, 0=Not DE) as a function of gene length. The PWF is used to weight the chance of selecting each gene when forming a null distribution for GO category membership. The fact that the PWF is calculated directly from the dataset under consideration makes this approach robust, only correcting for the length bias present in the data. For example, if `goseq` is run on a microarray dataset, for which no length bias exists, the calculated PWF will be nearly flat and all genes will be weighted equally, resulting in no length bias correction.

In order to account for the length bias inherent to RNA-seq data when performing a GO analysis (or other category based tests), one cannot simply use the hypergeometric distribution as the null distribution for category membership, which is appropriate for data without DE length bias, such as microarray data. GO analysis of RNA-seq data requires the use of random sampling in order to generate a suitable null distribution for GO category membership and calculate each categories significance for over representation amongst DE genes.

However, this random sampling is computationally expensive. In most cases, the Wallenius distribution can be used to approximate the true null distribution, without any significant loss in

accuracy. The **goseq** package implements this approximation as its default option. The option to generate the null distribution using random sampling is also included as an option.

Having established a null distribution, each GO category is then tested for over and under representation amongst the set of differentially expressed genes and the null is used to calculate a p-value for under and over representation.

## 4 Natively supported Gene Identifiers and category tests

**goseq** needs to know the length of each gene, as well as what GO categories (or other categories of interest) each gene is associated with. **goseq** relies on the UCSC genome browser to provide the length information for each gene. However, because the process of fetching the length of every transcript is slow and bandwidth intensive, **goseq** relies on an offline copy of this information stored in the data package **geneLenDataBase**. To see which genome/gene identifier combinations are in the local database, simply run:

```
> supportedGenomes()
```

or

```
> supportedGeneIDs()
```

The rightmost column in the output of both these commands lists the identifiers (in the case of **supportedGenomes**) or genomes (in the case of **supportedGeneIDs**) for which length data exists in the local database. If your genome/ID combination is not in the local database, it will be downloaded from the UCSC genome browser. If your genome/ID combination is not in the UCSC database, you will have to manually specify the gene lengths.

In order to link GO categories to genes, **goseq** uses the organism packages from Bioconductor. These packages are named `org.<Genome>.<ID>.db`, where `<Genome>` is a short string identifying the genome and `<ID>` is a short string identifying the gene identifier. Currently, **goseq** will automatically retrieve the mapping between GO categories and genes from the relevant package (as long as it is installed) for commonly used genome/ID combinations. If GO mappings are not automatically available for your genome/ID combination, you will have to manually specify the relationship between genes and categories. Although the Genome/ID naming conventions used by the organism packages differ from the UCSC, **goseq** is able to convert between the two, so the user need only ever specify the UCSC genome/ID in most cases.

## 5 Non-native Gene Identifier or category test

If the organism, Gene Identifier or category test you wish to perform is not in the native **goseq** database, you will have to supply one or all of the following:

- **Length data:** the length of each gene in your gene identifier format.
- **Category mappings:** the mapping (usually many-to-many) between the categories you wish to test for over/under representation amongst DE genes and genes in your gene identifier format.

## 5.1 Length data format

The length data must be formatted as a numeric vector, of the same length as the main named vector specifying gene names/DE genes. Each entry should give the length of the corresponding gene in bp. If length data is unavailable for some genes, that entry should be set to NA.

## 5.2 Category mapping format

The mapping between category names and genes should be given as a data frame with two columns. One column should contain the gene IDs and the other the name of an associated category. As the mapping between categories and genes is usually many-to-many, this data frame will usually have multiple rows with the same gene name and category name.

Alternatively, mappings between genes and categories can be given as a list. The names of list entries should be gene IDs and the entries themselves should be a vector of category names to which the gene ID corresponds.

## 5.3 Some additional tips

Any organism for which there is an annotation on either Ensembl or the UCSC, can be easily turned into length data using the GenomicFeatures package. To do this, first create a TranscriptDb object using either `makeTranscriptDbFromBiomart` or `makeTranscriptDbFromUCSC` (see the help in the GenomicFeatures package on using these commands). Once you have a transcriptDb object, you can get a vector named by gene ID containing the median transcript length of each gene simply by using the command.

```
> txsByGene=transcriptsBy(txdb,"gene")
> lengthData=median(width(txsByGene))
```

The relationship between gene identifier and GO category can usually be obtained from the Gene Ontology website ([www.geneontology.org](http://www.geneontology.org)) or from the NCBI. Additionally, the bioconductor AnnotationDbi library has recently added a function "makeOrgPackageFromNCBI", which can be used to create an organism package from within R, using the NCBI data. Once created, this package can then be used to obtain the mapping between genes and gene ontology.

## 6 Case study: Prostate cancer data

### 6.1 Introduction

This section provides an analysis of data from an RNA-seq experiment to illustrate the use of `goseq` for GO analysis.

This experiment examined the effects of androgen stimulation on a human prostate cancer cell line, LNCaP. The data set includes more than 17 million short cDNA reads obtained for both the treated and untreated cell line and sequenced on Illumina's 1G genome analyzer.

For each sample we were provided with the raw 35 bp RNA-seq reads from the authors. For the untreated prostate cancer cells (LNCaP cell line) there were 4 lanes totaling 10 million, 35 bp reads. For the treated cells there were 3 lanes totaling 7 million, 35 bp reads. All replicates were technical replicates. Reads were mapped to NCBI version 36.3 of the human genome using `bowtie`. Any read with which mapped to multiple locations was discarded. Using the ENSEMBL 54 annotation from `biomart`, each mapped read was associated with an ENSEMBL gene. This was done by associating any read that overlapped with any part of the gene (not just the exons) with that gene. Reads that did not correspond to genes were discarded.

### 6.2 Source of the data

The data set used in this case study is taken from [Li et al., 2008] and was made available from the authors upon request.

### 6.3 Determining the DE genes using `edgeR`

To begin with, we load in the text data and convert it the appropriate `edgeR` `DGEList` object.

```
> library(edgeR)
> table.summary=read.table(system.file("extdata","Li_sum.txt",package='goseq'),
+                           sep='\t',header=TRUE,stringsAsFactors=FALSE)
> counts=table.summary[,-1]
> rownames(counts)=table.summary[,1]
> grp=factor(rep(c("Control","Treated"),times=c(4,3)))
> summarized=DGEList(counts,lib.size=colSums(counts),group=grp)
```

Next, we use `edgeR` to estimate the biological dispersion and calculate differential expression using a negative binomial model.

```
> disp=estimateCommonDisp(summarized)
> disp$common.dispersion

[1] 0.05688364
```

```
> tested=exactTest(disp)
> topTags(tested)
```

Comparison of groups: Treated-Control

	logFC	logCPM	PValue	FDR
ENSG00000127954	11.557868	6.680748	2.574972e-80	1.274766e-75
ENSG00000151503	5.398963	8.499530	1.781732e-65	4.410321e-61
ENSG00000096060	4.897600	9.446705	7.983756e-60	1.317479e-55
ENSG00000091879	5.737627	6.282646	1.207655e-54	1.494654e-50
ENSG00000132437	-5.880436	7.951910	2.950042e-52	2.920896e-48
ENSG00000166451	4.564246	8.458467	7.126763e-52	5.880292e-48
ENSG00000131016	5.254737	6.607957	1.066807e-51	7.544766e-48
ENSG00000163492	7.085400	5.128514	2.716461e-45	1.681014e-41
ENSG00000113594	4.051053	8.603264	9.272066e-44	5.100255e-40
ENSG00000116285	4.108522	7.864773	6.422468e-43	3.179507e-39

Finally, we Format the DE genes into a vector suitable for use with `goseq`

```
> genes=as.integer(p.adjust(tested$table$PValue[tested$table$logFC!=0],
+                          method="BH")<.05)
> names(genes)=row.names(tested$table[tested$table$logFC!=0,])
> table(genes)
```

```
genes
  0    1
19535 3208
```

## 6.4 Determining Genome and Gene ID

In order to allow for automatic data retrieval, the user has to tell `goseq` what genome and gene ID format were used to summarize the data. In our case we will use the GRCh37 build of the human genome, we check what code this corresponds to by running:

```
> head(supportedGenomes())[1:4]
```

	db	species	date	name
1	hg38	Human	Dec. 2013	Genome Reference Consortium GRCh38
2	hg19	Human	Feb. 2009	Genome Reference Consortium GRCh37
3	hg18	Human	Mar. 2006	NCBI Build 36.1
4	hg17	Human	May 2004	NCBI Build 35
5	hg16	Human	Jul. 2003	NCBI Build 34
6	vicPac2	Alpaca	Mar. 2013	Broad Institute Vicugna_pacos-2.0.1

Which lists the genome codes in the far left column, headed “db”. As we are using GRCh37, we see that we should use “hg19”. We also know that we used ENSEMBL Gene ID to summarize our read data, we check what code this corresponds to by running:

```
> head(supportedGeneIDs(),n=12)[,1:4]
```

	db	track	subtrack	GeneID
1	knownGene	UCSC Genes	<NA>	Entrez Gene ID
2	knownGeneOld3	Old UCSC Genes	<NA>	
3	ccdsGene	CCDS	<NA>	
4	refGene	RefSeq Genes	<NA>	Entrez Gene ID
5	xenoRefGene	Other RefSeq	<NA>	
6	vegaGene	Vega Genes	Vega Protein Genes	HAVANA Pseudogene ID
7	vegaPseudoGene	Vega Genes	Vega Pseudogenes	HAVANA Pseudogene ID
8	ensGene	Ensembl Genes	<NA>	Ensembl gene ID
9	acembly	AceView Genes	<NA>	
10	sibGene	SIB Genes	<NA>	
11	nscanPasaGene	N-SCAN	N-SCAN PASA-EST	
12	nscanGene	N-SCAN	N-SCAN	

Note that the head command, and first four columns, is only used here to save on space in this guide. Again, the gene ID codes are listed in the far left “db” column. We find that our gene ID code is “ensGene”. We will use these strings whenever we are asked for a genome or id.


## 6.5 GO analysis

### 6.5.1 Fitting the Probability Weighting Function (PWF)

We first need to obtain a weighting for each gene, depending on its length, given by the PWF. As you may have noticed when running supportedGenomes or supportedGeneIDs, length data is available in the local database for our gene ID, “ensGene” and our genome, “hg19”. We will let goseq automatically fetch this data from its databases.

```
> pwf=nullp(genes,"hg19","ensGene")
> head(pwf)
```

	DEgenes	bias.data	pwf
ENSG00000230758	0	247	0.03757470
ENSG00000182463	0	3133	0.20436865
ENSG00000124208	0	1978	0.16881769
ENSG00000230753	0	466	0.06927243
ENSG00000224628	0	1510	0.15903532
ENSG00000125835	0	954	0.12711992

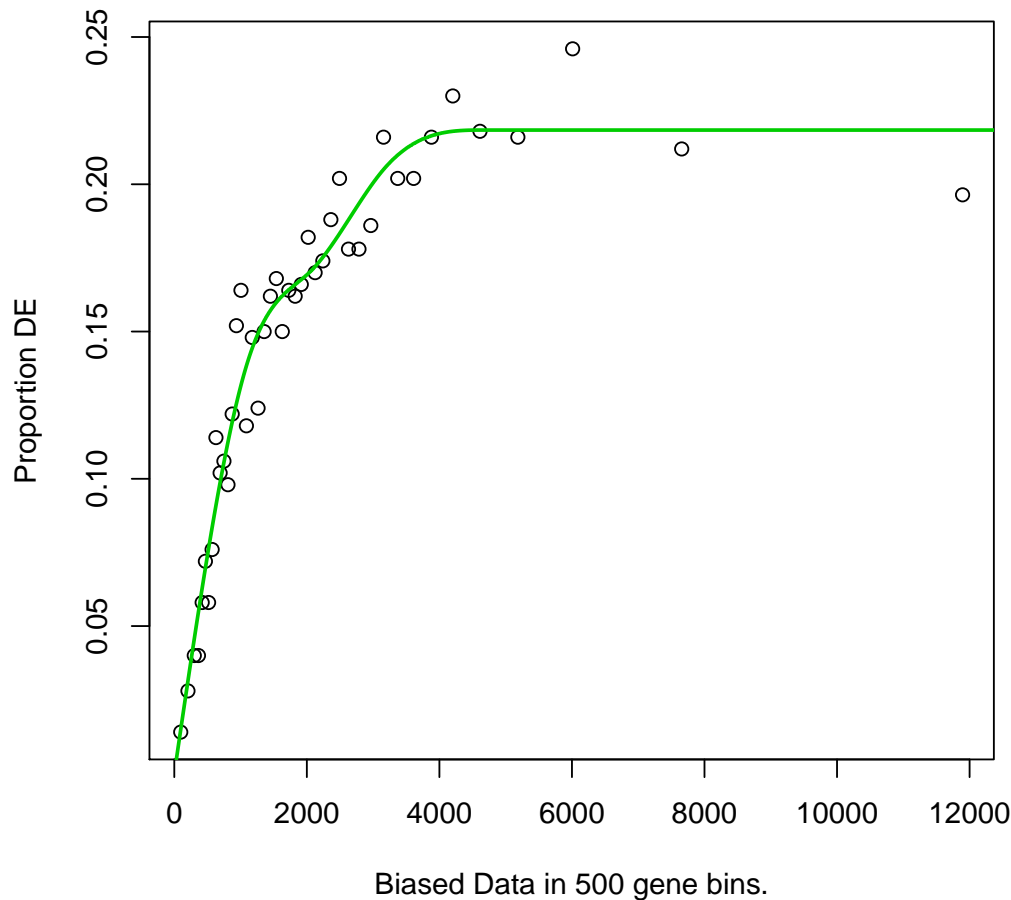

`nullp` plots the resulting fit, allowing verification of the goodness of fit before continuing the analysis. Further plotting of the pwf can be performed using the `plotPWF` function.

The output of `nullp` contains all the data used to create the PWF, as well as the PWF itself. It is a data frame with 3 columns, named "DEgenes", "bias.data" and "pwf" with the rownames set to the gene names. Each row corresponds to a gene with the DEgenes column specifying if the gene is DE (1 for DE, 0 for not DE), the bias.data column giving the numeric value of the DE bias being accounted for (usually the gene length or number of counts) and the pwf column giving the genes value on the probability weighting function.

### 6.5.2 Using the Wallenius approximation

To start with we will use the default method, to calculate the over and under expressed GO categories among DE genes. Again, we allow `goseq` to fetch data automatically, except this time



the data being fetched is the relationship between ENSEMBL gene IDs and GO categories.

```
> GO.wall=goseq(pwf, "hg19", "ensGene")
> head(GO.wall)
```

	category	over_represented_pvalue	under_represented_pvalue	numDEInCat		
10729	GO:0044763	8.237627e-15		1	1893	
10708	GO:0044699	2.079753e-14		1	2054	
2453	GO:0005737	2.956026e-10		1	1790	
3004	GO:0006614	6.131543e-09		1	39	
7499	GO:0031982	1.101818e-08		1	638	
2372	GO:0005576	1.339207e-08		1	669	
	numInCat					term ontology
10729	8355		single-organism cellular process			BP
10708	9201		single-organism process			BP
2453	8080		cytoplasm			CC
3004	107	SRP-dependent cotranslational protein targeting to membrane				BP
7499	2675		vesicle			CC
2372	2836		extracellular region			CC

The resulting object is ordered by GO category over representation amongst DE genes.

### 6.5.3 Using random sampling

It may sometimes be desirable to use random sampling to generate the null distribution for category membership. This is easily accomplished by using the `method` option to specify sampling and the `repcnt` option to specify the number of samples to generate:


```
> GO.samp=goseq(pwf, "hg19", "ensGene", method="Sampling", repcnt=1000)
> head(GO.samp)
```

	category	over_represented_pvalue	under_represented_pvalue	numDEInCat		
92	GO:0000184	0.000999001		1	32	
109	GO:0000226	0.000999001		1	102	
132	GO:0000278	0.000999001		1	237	
133	GO:0000280	0.000999001		1	128	
910	GO:0002376	0.000999001		1	369	
1431	GO:0003735	0.000999001		1	38	
	numInCat					term
92	116	nuclear-transcribed mRNA catabolic process, nonsense-mediated decay				
109	333		microtubule cytoskeleton organization			
132	855		mitotic cell cycle			

133	434	nuclear division
910	1550	immune system process
1431	143	structural constituent of ribosome
	ontology	
92	BP	
109	BP	
132	BP	
133	BP	
910	BP	
1431	MF	

You will notice that this takes far longer than the Wallenius approximation. Plotting the p-values against one another, we see that there is little difference between the two methods.

```
> plot(log10(GO.wall[,2]), log10(GO.samp[match(GO.samp[,1],GO.wall[,1]),2]),
+       xlab="log10(Wallenius p-values)",ylab="log10(Sampling p-values)",
+       xlim=c(-3,0))
> abline(0,1,col=3,lty=2)
```

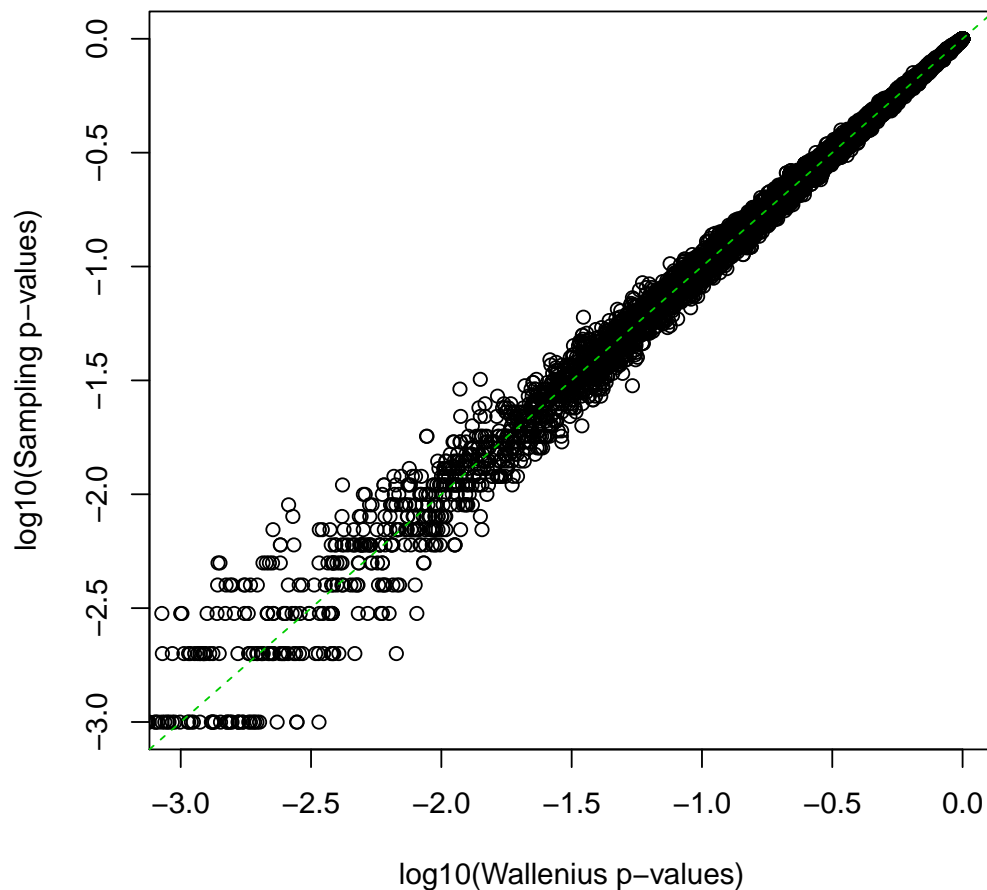

#### 6.5.4 Ignoring length bias

`goseq` also allows for one to perform a GO analysis without correcting for RNA-seq length bias. In practice, this is only useful for assessing the effect of length bias on your results. You should NEVER use this option as your final analysis. If length bias is truly not present in your data, `goseq` will produce a nearly flat PWF and no length bias correction will be applied to your data and all methods will produce the same results.

However, if you still wish to ignore length bias in calculating GO category enrichment, this is again accomplished using the `method` option.

```
> GO.nobias=goseq(pwf,"hg19","ensGene",method="Hypergeometric")
> head(GO.nobias)
```


	category	over_represented_pvalue	under_represented_pvalue	numDEInCat
10729	G0:0044763	5.555864e-16	1.0000000	1893
10708	G0:0044699	1.870292e-15	1.0000000	2054
2453	G0:0005737	3.622336e-09	1.0000000	1790
3285	G0:0007049	6.740576e-08	1.0000000	366
3702	G0:0008283	1.226555e-07	0.9999999	335
6488	G0:0022402	1.299738e-07	0.9999999	286

	numInCat	term	ontology
10729	8355	single-organism cellular process	BP
10708	9201	single-organism process	BP
2453	8080	cytoplasm	CC
3285	1402	cell cycle	BP
3702	1274	cell proliferation	BP
6488	1063	cell cycle process	BP

Ignoring length bias gives very different results from a length bias corrected analysis.

```
> plot(log10(G0.wall[,2]), log10(G0.nobias[match(G0.nobias[,1],G0.wall[,1]),2]),
+       xlab="log10(Wallenius p-values)", ylab="log10(Hypergeometric p-values)",
+       xlim=c(-3,0), ylim=c(-3,0))
> abline(0,1,col=3,lty=2)
```

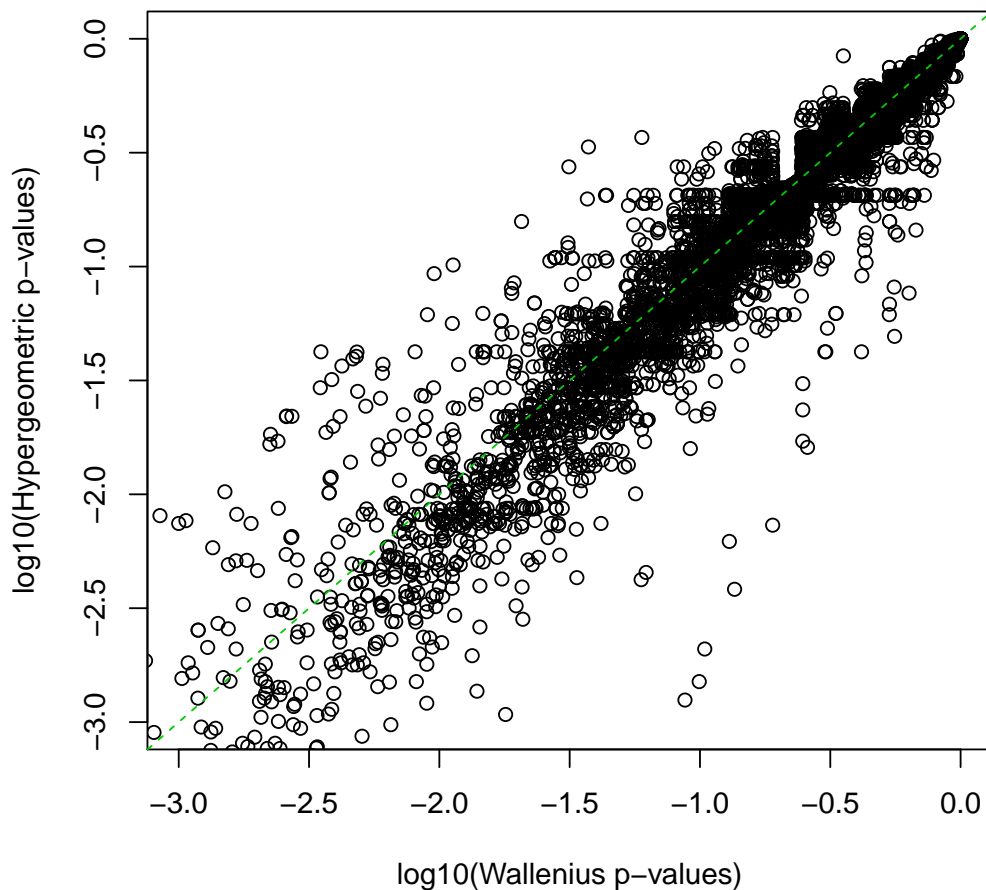

### 6.5.5 Limiting GO categories and other category based tests

By default, `goseq` tests all three major Gene Ontology branches; Cellular Components, Biological Processes and Molecular Functions. However, it is possible to limit testing to any combination of the major branches by using the `test.cats` argument to the `goseq` function. This is done by specifying a vector consisting of some combination of the strings “GO:CC”, “GO:BP” and “GO:MF”. For example, to test for only Molecular Function GO categories:

```
> GO.MF=goseq(pwf, "hg19", "ensGene", test.cats=c("GO:MF"))
> head(GO.MF)
```

	category	over_represented_pvalue	under_represented_pvalue	numDEInCat
1038	GO:0005198	4.273068e-06	0.9999979	122
236	GO:0003735	8.389043e-05	0.9999635	38

940	GO:0005001	4.617515e-04	0.9999479	9
2096	GO:0019198	4.617515e-04	0.9999479	9
1192	GO:0008092	7.077009e-04	0.9994909	172
2163	GO:0019900	1.073049e-03	0.9992690	119
	numInCat			term ontology
1038	442		structural molecule activity	MF
236	143		structural constituent of ribosome	MF
940	13	transmembrane receptor protein tyrosine phosphatase activity		MF
2096	13	transmembrane receptor protein phosphatase activity		MF
1192	643	cytoskeletal protein binding		MF
2163	431	kinase binding		MF

Native support for other category tests, such as KEGG pathway analysis are also made available via this argument. See the man `goseq` function man page for up to date information on what category tests are natively supported.

### 6.5.6 Making sense of the results

Having performed the GO analysis, you may now wish to interpret the results. If you wish to identify categories significantly enriched/unenriched below some p-value cutoff, it is necessary to first apply some kind of multiple hypothesis testing correction. For example, GO categories over enriched using a .05 FDR cutoff [Benjamini and Hochberg, 1995] are:

```
> enriched.GO=GO.wall$category[p.adjust(GO.wall$over_represented_pvalue,
+                                     method="BH")<.05]
> head(enriched.GO)
```

```
[1] "GO:0044763" "GO:0044699" "GO:0005737" "GO:0006614" "GO:0031982" "GO:0005576"
```

Unless you are a machine, GO accession identifiers are probably not very meaningful to you. Information about each term can be obtained from the Gene Ontology website, <http://www.geneontology.org/>, or using the R package `GO.db`.

```
> library(GO.db)
> for(go in enriched.GO[1:10]){
+   print(GOTERM[[go]])
+   cat("-----\n")
+ }
```

GOID: GO:0044763

Term: single-organism cellular process

Ontology: BP

Definition: Any process that is carried out at the cellular level,

occurring within a single organism.

-----  
GOID: GO:0044699

Term: single-organism process

Ontology: BP

Definition: A biological process that involves only one organism.

Synonym: single organism process  
-----

GOID: GO:0005737

Term: cytoplasm

Ontology: CC

Definition: All of the contents of a cell excluding the plasma membrane and nucleus, but including other subcellular structures.  
-----

GOID: GO:0006614

Term: SRP-dependent cotranslational protein targeting to membrane

Ontology: BP

Definition: The targeting of proteins to a membrane that occurs during translation and is dependent upon two key components, the signal-recognition particle (SRP) and the SRP receptor. SRP is a cytosolic particle that transiently binds to the endoplasmic reticulum (ER) signal sequence in a nascent protein, to the large ribosomal unit, and to the SRP receptor in the ER membrane.

Synonym: ER translocation

Synonym: SRP-dependent cotranslational membrane targeting

Synonym: SRP-dependent cotranslational protein-membrane targeting  
-----

GOID: GO:0031982

Term: vesicle

Ontology: CC

Definition: Any small, fluid-filled, spherical organelle enclosed by membrane or protein.  
-----

GOID: GO:0005576

Term: extracellular region

Ontology: CC

Definition: The space external to the outermost structure of a cell. For cells without external protective or external encapsulating structures this refers to space outside of the plasma membrane. This term covers the host cell environment outside an intracellular parasite.

Synonym: extracellular  
-----

GOID: GO:0044421

Term: extracellular region part

Ontology: CC

Definition: Any constituent part of the extracellular region, the space external to the outermost structure of a cell. For cells without external protective or external encapsulating structures this refers to space outside of the plasma membrane. This term covers constituent parts of the host cell environment outside an intracellular parasite.

Synonym: extracellular structure

-----

GOID: GO:0006613

Term: cotranslational protein targeting to membrane

Ontology: BP

Definition: The targeting of proteins to a membrane that occurs during translation. The transport of most secretory proteins, particularly those with more than 100 amino acids, into the endoplasmic reticulum lumen occurs in this manner, as does the import of some proteins into mitochondria.

Synonym: cotranslational membrane targeting

Synonym: cotranslational protein membrane targeting

Synonym: cotranslational protein-membrane targeting

-----

GOID: GO:0045047

Term: protein targeting to ER

Ontology: BP

Definition: The process of directing proteins towards the endoplasmic reticulum (ER) using signals contained within the protein. One common mechanism uses a 16- to 30-residue signal sequence, typically located at the N-terminus of the protein and containing positively charged amino acids followed by a continuous stretch of hydrophobic residues, which directs the ribosome to the ER membrane and initiates transport of the growing polypeptide across the ER membrane.

Synonym: protein targeting to endoplasmic reticulum

Synonym: protein-endoplasmic reticulum targeting

Synonym: protein-ER targeting

-----

GOID: GO:0031988

Term: membrane-bounded vesicle

Ontology: CC

Definition: Any small, fluid-filled, spherical organelle enclosed by a lipid bilayer.

Synonym: membrane-enclosed vesicle



---

### 6.5.7 Understanding goseq internals

The situation may arise where it is necessary for the user to perform some of the data processing steps usually performed automatically by **goseq** themselves. With this in mind, it will be useful to step through the preprocessing steps performed automatically by **goseq** to understand what is happening.

To start with, when **nullp** is called, **goseq** uses the genome and gene identifiers supplied to try and retrieve length information for all genes given to the **genes** argument. To do this, it retrieves the data from the database of gene lengths maintained in the package **geneLenDataBase**. This is performed by the **getlength** function in the following way:

```
> len=getlength(names(genes),"hg19","ensGene")
> length(len)

[1] 22743

> length(genes)

[1] 22743

> head(len)

[1] 247 3133 1978 466 1510 954
```

After some data cleanup, the length data and the DE data is then passed to the **makespline** function to produce the PWF. The **nullp** returns a data frame which has 3 columns, the original DEgenes vector, the length bias data (in a column called bias.data) and the PWF itself (in a column named pwf). The names of the genes are also kept in this data frame as the names of the rows. If length data could not be obtained for a certain gene the corresponding entries in the "bias.data" and "pwf" columns are set to NA.

Next we call the **goseq** function to determine over/under representation of GO categories amongst DE genes. When we do this, **goseq** looks for the appropriate organism package and tries to obtain the mapping from genes to GO categories from it. This is done using the **getgo** function as follows:

```
> go=getgo(names(genes),"hg19","ensGene")
> length(go)

[1] 22743

> length(genes)
```

[1] 22743

> head(go)

\$<NA>

NULL

\$ENSG00000182463

[1] "GO:0006139" "GO:0006351" "GO:0006355" "GO:0006725" "GO:0006807" "GO:0007275"  
[7] "GO:0008150" "GO:0008152" "GO:0009058" "GO:0009059" "GO:0009889" "GO:0009987"  
[13] "GO:0010467" "GO:0010468" "GO:0010556" "GO:0016070" "GO:0018130" "GO:0019219"  
[19] "GO:0019222" "GO:0019438" "GO:0031323" "GO:0031326" "GO:0032501" "GO:0032502"  
[25] "GO:0032774" "GO:0034641" "GO:0034645" "GO:0034654" "GO:0043170" "GO:0044237"  
[31] "GO:0044238" "GO:0044249" "GO:0044260" "GO:0044271" "GO:0044699" "GO:0044707"  
[37] "GO:0044767" "GO:0046483" "GO:0050789" "GO:0050794" "GO:0051171" "GO:0051252"  
[43] "GO:0060255" "GO:0065007" "GO:0071704" "GO:0080090" "GO:0090304" "GO:0097659"  
[49] "GO:1901360" "GO:1901362" "GO:1901576" "GO:1903506" "GO:2000112" "GO:2001141"  
[55] "GO:0005575" "GO:0005622" "GO:0005623" "GO:0005634" "GO:0043226" "GO:0043227"  
[61] "GO:0043229" "GO:0043231" "GO:0044424" "GO:0044464" "GO:0003674" "GO:0003676"  
[67] "GO:0003677" "GO:0005488" "GO:0043167" "GO:0043169" "GO:0046872" "GO:0097159"  
[73] "GO:1901363"

\$ENSG00000124208

[1] "GO:0000209" "GO:0002218" "GO:0002221" "GO:0002224" "GO:0002253" "GO:0002376"  
[7] "GO:0002429" "GO:0002682" "GO:0002684" "GO:0002753" "GO:0002755" "GO:0002757"  
[13] "GO:0002758" "GO:0002764" "GO:0002768" "GO:0006139" "GO:0006259" "GO:0006281"  
[19] "GO:0006282" "GO:0006301" "GO:0006351" "GO:0006355" "GO:0006464" "GO:0006725"  
[25] "GO:0006807" "GO:0006950" "GO:0006952" "GO:0006955" "GO:0006974" "GO:0007154"  
[31] "GO:0007165" "GO:0007166" "GO:0007249" "GO:0008150" "GO:0008152" "GO:0009058"  
[37] "GO:0009059" "GO:0009889" "GO:0009891" "GO:0009893" "GO:0009966" "GO:0009967"  
[43] "GO:0009987" "GO:0010467" "GO:0010468" "GO:0010556" "GO:0010557" "GO:0010604"  
[49] "GO:0010628" "GO:0010646" "GO:0010647" "GO:0016070" "GO:0016567" "GO:0018130"  
[55] "GO:0019219" "GO:0019222" "GO:0019438" "GO:0019538" "GO:0023051" "GO:0023052"  
[61] "GO:0023056" "GO:0030154" "GO:0030522" "GO:0031323" "GO:0031325" "GO:0031326"  
[67] "GO:0031328" "GO:0031347" "GO:0031349" "GO:0032446" "GO:0032502" "GO:0032774"  
[73] "GO:0033554" "GO:0034134" "GO:0034142" "GO:0034146" "GO:0034162" "GO:0034166"  
[79] "GO:0034641" "GO:0034645" "GO:0034654" "GO:0035556" "GO:0035872" "GO:0036211"  
[85] "GO:0038093" "GO:0038095" "GO:0038123" "GO:0038124" "GO:0042275" "GO:0043122"  
[91] "GO:0043123" "GO:0043170" "GO:0043412" "GO:0044093" "GO:0044237" "GO:0044238"  
[97] "GO:0044249" "GO:0044260" "GO:0044267" "GO:0044271" "GO:0044699" "GO:0044700"  
[103] "GO:0044710" "GO:0044763" "GO:0044767" "GO:0045087" "GO:0045088" "GO:0045089"  
[109] "GO:0045893" "GO:0045935" "GO:0046483" "GO:0048518" "GO:0048522" "GO:0048583"  
[115] "GO:0048584" "GO:0048869" "GO:0050776" "GO:0050778" "GO:0050789" "GO:0050794"

[121] "G0:0050851" "G0:0050852" "G0:0050896" "G0:0051052" "G0:0051090" "G0:0051091"  
 [127] "G0:0051092" "G0:0051171" "G0:0051173" "G0:0051252" "G0:0051254" "G0:0051716"  
 [133] "G0:0060255" "G0:0065007" "G0:0065009" "G0:0070423" "G0:0070534" "G0:0070647"  
 [139] "G0:0071704" "G0:0080090" "G0:0080134" "G0:0080135" "G0:0090304" "G0:0097659"  
 [145] "G0:1901360" "G0:1901362" "G0:1901576" "G0:1902531" "G0:1902533" "G0:1902680"  
 [151] "G0:1903506" "G0:1903508" "G0:2000112" "G0:2001020" "G0:2001141" "G0:0000151"  
 [157] "G0:0005575" "G0:0005576" "G0:0005622" "G0:0005623" "G0:0005634" "G0:0005737"  
 [163] "G0:0005829" "G0:0031371" "G0:0031982" "G0:0031988" "G0:0032991" "G0:0035370"  
 [169] "G0:0043226" "G0:0043227" "G0:0043229" "G0:0043230" "G0:0043231" "G0:0043234"  
 [175] "G0:0044421" "G0:0044424" "G0:0044444" "G0:0044464" "G0:0065010" "G0:0070062"  
 [181] "G0:1902494" "G0:1903561" "G0:1990234" "G0:0003674" "G0:0003824" "G0:0004842"  
 [187] "G0:0005488" "G0:0005515" "G0:0016740" "G0:0019787" "G0:0019899" "G0:0031624"  
 [193] "G0:0031625" "G0:0044389" "G0:0044390" "G0:0061630" "G0:0061659"

\$<NA>

NULL

\$<NA>

NULL

\$ENSG00000125835

[1] "G0:0000375" "G0:0000377" "G0:0000387" "G0:0000398" "G0:0000422" "G0:0006139"  
 [7] "G0:0006351" "G0:0006353" "G0:0006366" "G0:0006369" "G0:0006396" "G0:0006397"  
 [13] "G0:0006725" "G0:0006807" "G0:0006914" "G0:0006996" "G0:0007005" "G0:0008150"  
 [19] "G0:0008152" "G0:0008334" "G0:0008380" "G0:0009056" "G0:0009058" "G0:0009059"  
 [25] "G0:0009894" "G0:0009987" "G0:0010467" "G0:0010506" "G0:0010821" "G0:0016043"  
 [31] "G0:0016070" "G0:0016071" "G0:0018130" "G0:0019222" "G0:0019438" "G0:0022411"  
 [37] "G0:0022607" "G0:0022613" "G0:0022618" "G0:0031123" "G0:0031124" "G0:0031323"  
 [43] "G0:0031329" "G0:0032774" "G0:0033043" "G0:0034622" "G0:0034641" "G0:0034645"  
 [49] "G0:0034654" "G0:0034660" "G0:0043170" "G0:0043933" "G0:0044085" "G0:0044237"  
 [55] "G0:0044238" "G0:0044248" "G0:0044249" "G0:0044260" "G0:0044271" "G0:0044699"  
 [61] "G0:0044710" "G0:0044712" "G0:0044763" "G0:0046483" "G0:0050789" "G0:0050794"  
 [67] "G0:0051128" "G0:0065003" "G0:0065007" "G0:0071704" "G0:0071826" "G0:0071840"  
 [73] "G0:0090304" "G0:0097659" "G0:1901360" "G0:1901362" "G0:1901576" "G0:1902589"  
 [79] "G0:1903008" "G0:1903146" "G0:0005575" "G0:0005576" "G0:0005622" "G0:0005623"  
 [85] "G0:0005634" "G0:0005654" "G0:0005681" "G0:0005683" "G0:0005685" "G0:0005687"  
 [91] "G0:0005689" "G0:0005737" "G0:0005829" "G0:0030529" "G0:0030532" "G0:0031974"  
 [97] "G0:0031981" "G0:0031982" "G0:0031988" "G0:0032991" "G0:0034708" "G0:0034709"  
 [103] "G0:0034719" "G0:0043226" "G0:0043227" "G0:0043229" "G0:0043230" "G0:0043231"  
 [109] "G0:0043233" "G0:0043234" "G0:0044421" "G0:0044422" "G0:0044424" "G0:0044428"  
 [115] "G0:0044444" "G0:0044446" "G0:0044464" "G0:0065010" "G0:0070013" "G0:0070062"  
 [121] "G0:0071013" "G0:0071204" "G0:1902494" "G0:1903561" "G0:1990234" "G0:0003674"

```
[127] "GO:0003676" "GO:0003723" "GO:0005488" "GO:0005515" "GO:0044822" "GO:0071208"
[133] "GO:0097159" "GO:1901363"
```

Note that some of the gene categories have been returned as "NULL". This means that a GO category could not be found in the database for one of the genes. In the `goseq` command, enrichment will only be calculated using genes with a GO category by default. However, in older versions of `goseq` (below 1.15.2), we counted all genes. i.e. genes with no categories still counted towards the total number of gene outside of any single category. It is possible to switch between these two behaviors using the `use_genes_without_cat` flag in `goseq`.

The first thing the `getgo` function does is to convert the UCSC genome/ID namings into the naming convention used by the organism packages. This is done using two hard coded conversion vectors that are included in the `goseq` package but usually hidden from the user.

```
> goseq:::.ID_MAP
```

knownGene	refGene	ensGene	geneSymbol	sgd	plasmo	tair
"eg"	"REFSEQ"	"ENSEMBL"	"SYMBOL"	"sgd"	"plasmo"	"tair"

```
> goseq:::.ORG_PACKAGES
```

anoGam	Arabidopsis	bosTau	ce
"org.Ag.eg"	"org.At.tair"	"org.Bt.eg"	"org.Ce.eg"
canFam	dm	danRer	E. coli K12
"org.Cf.eg"	"org.Dm.eg"	"org.Dr.eg"	"org.EcK12.eg"
E. coli Sakai	galGal	hg	mm
"org.EcSakai.eg"	"org.Gg.eg"	"org.Hs.eg"	"org.Mm.eg"
rheMac	Malaria	panTro	rn
"org.Mmu.eg"	"org.Pf.plasmo"	"org.Pt.eg"	"org.Rn.eg"
sacCer	susScr	xenTro	
"org.Sc.sgd"	"org.Ss.eg"	"org.Xl.eg"	

It is just as valid to run the length and GO category fetching as separate steps and then pass the result to the `nullp` and `goseq` functions using the `bias.data` and `gene2cat` arguments. Thus the following two blocks of code are equivalent:

```
> pwf=nullp(genes,"hg19","ensGene")
> go=goseq(pwf,"hg19","ensGene")
```

and

```
> gene_lengths=getlength(names(genes),"hg19","ensGene")
> pwf=nullp(genes,bias.data=gene_lengths)
> go_map=getgo(names(genes),"hg19","ensGene")
> go=goseq(pwf,"hg19","ensGene",gene2cat=go_map)
```

## 6.6 KEGG pathway analysis

In order to illustrate performing a category test not present in the `goseq` database, we perform a KEGG pathway analysis. For human, the mapping from KEGG pathways to genes are stored in the package `org.Hs.eg.db`, in the object `org.Hs.egPATH`. In order to test for KEGG pathway over representation amongst DE genes, we need to extract this information and put it in a format that `goseq` understands. Unfortunately, the `org.Hs.eg.db` package does not contain direct mappings between ENSEMBL gene ID and KEGG pathway. Therefore, we have to construct this map by combining the ENSEMBL  $\leftrightarrow$  Entrez and Entrez  $\leftrightarrow$  KEGG mappings. This can be done using the following code:

```
> # Get the mapping from ENSEMBL 2 Entrez
> en2eg=as.list(org.Hs.egENSEMBL2EG)
> # Get the mapping from Entrez 2 KEGG
> eg2kegg=as.list(org.Hs.egPATH)
> # Define a function which gets all unique KEGG IDs
> # associated with a set of Entrez IDs
> grepKEGG=function(id,mapkeys){unique(unlist(mapkeys[id],use.names=FALSE))}
> # Apply this function to every entry in the mapping from
> # ENSEMBL 2 Entrez to combine the two maps
> kegg=lapply(en2eg,grepKEGG,eg2kegg)
> head(kegg)
```

Note that this step is quite time consuming. The code written here is not the most efficient way of producing this result, but the logic is much clearer than faster algorithms. The source code for `getgo` contains a more efficient routine.

We produce the PWF as before. Then, to perform a KEGG analysis, we simply make use of the `gene2cat` option in `goseq`:

```
> pwf=nullp(genes,"hg19","ensGene")
> KEGG=goseq(pwf,gene2cat=kegg)
> head(KEGG)
```

Note that we do not have to tell the `goseq` function what organism and gene ID we are using as we are manually supplying the mapping between genes and categories.

KEGG analysis is shown as an illustration of how to supply your own mapping between gene ID and category, KEGG analysis is actually natively supported by `GOseq` and we could have performed it with the following code.

```
> pwf=nullp(genes,'hg19','ensGene')
> KEGG=goseq(pwf,'hg19','ensGene',test.cats="KEGG")
> head(KEGG)
```

	category	over_represented_pvalue	under_represented_pvalue	numDEInCat	numInCat
88	03010	6.298067e-06	0.9999980	29	87
77	00900	4.751017e-04	0.9999318	10	16
113	04115	8.144785e-04	0.9996843	26	64
27	00330	1.765413e-03	0.9993881	19	45
175	04964	2.147830e-03	0.9995931	10	17
20	00250	5.192312e-03	0.9984384	13	28

Noting that this time it was necessary to tell the `goseq` function that we are using HG19 and ENSEMBL gene ID, as the function needs this information to automatically construct the mapping from geneid to KEGG pathway.

## 6.7 Extracting mappings from organism packages

If you know that the information mapping gene ID to your categories of interest is contained in the organism packages, but `goseq` fails to fetch it automatically, you may want to extract it yourself and then pass it to the `goseq` function using the `gene2cat` argument. This is done in exactly the same way as extracting the KEGG to ENSEMBL mappings in the section “KEGG pathway analysis” above. This example is actually the worst case, where it is necessary to combine two mappings to get the desired list. If we had instead wanted the association between Entrez gene IDs and KEGG pathways, the following code would have been sufficient:

```
> kegg=as.list(org.Hs.egPATH)
> head(kegg)
```

```
$`1`
[1] NA
```

```
$`2`
[1] "04610"
```

```
$`3`
[1] NA
```

```
$`9`
[1] "00232" "00983" "01100"
```

```
$`10`
[1] "00232" "00983" "01100"
```

```
$`11`
[1] NA
```

A note on fetching GO mappings from the organism. The data structure of GO is a directed acyclic graph. This means that in addition to each GO category being associated with a set of genes, it may also have children that are associated to other genes. It is important to use the `org.Hs.egGO2ALLEGS` and NOT the `org.Hs.egGO` object to create the mapping between GO categories and gene identifiers, as the latter does not include the links to genes arising from "child" GO categories. Thank you to Christopher Fjell for pointing this out.

## 6.8 Correcting for other biases

It is possible that in some circumstances you will wish to correct not just for length bias, but for the total number of counts. This can make sense because power to detect DE depends on the total number of counts a gene receives, which is the product of gene length and gene expression. So correcting for read count bias will compensate for all biases, known and unknown, in power to detect DE. On the other hand, it will also remove bias resulting from differences in expression level, which may not be desirable.

Correcting for count bias will produce a different PWF. Therefore, we need to tell `goseq` about the data on which the fraction DE depends when calculating the PWF using the `nullp` function. We then simply pass the result to `goseq` as usual.

So, in order to tell `goseq` to correct for read count bias instead of length bias, all you need to do is supply a numeric vector, containing the number of counts for each gene to `nullp`.

```
> countbias=rowSums(counts)[rowSums(counts)!=0]
> length(countbias)
```

```
[1] 22743
```

```
> length(genes)
```

```
[1] 22743
```

To use the count bias when doing GO analysis, simply pass this vector to `nullp` using the `bias.data` option. Note that we have to supply "hg19" and "ensGene" to `goseq` as it is not used by `nullp` and hence not in the `pwf.counts` object.

```
> pwf.counts=nullp(genes,bias.data=countbias)
> GO.counts=goseq(pwf.counts,"hg19","ensGene")
> head(GO.counts)
```

	category	over_represented_pvalue	under_represented_pvalue	numDEInCat
10729	GO:0044763	6.849975e-14	1	1893
10708	GO:0044699	1.232599e-13	1	2054

5242	G0:0016021	1.160122e-11	1	714
7158	G0:0031224	2.573505e-11	1	721
10650	G0:0044425	4.018483e-11	1	912
2553	G0:0005886	4.518458e-11	1	666
	numInCat			term ontology
10729	8355	single-organism cellular process		BP
10708	9201	single-organism process		BP
5242	3173	integral component of membrane		CC
7158	3231	intrinsic component of membrane		CC
10650	4044	membrane part		CC
2553	2829	plasma membrane		CC

Note that if you want to correct for length bias, but your organism/gene identifier is not natively supported, then you need to follow the same procedure as above, only the numeric vector supplied will contain each gene's length instead of its number of reads.

## 7 Setup

This vignette was built on:

```
> sessionInfo()
```

```
R version 3.2.0 RC (2015-04-08 r68161)
```

```
Platform: x86_64-w64-mingw32/x64 (64-bit)
```

```
Running under: Windows Server 2008 R2 x64 (build 7601) Service Pack 1
```

```
locale:
```

```
[1] LC_COLLATE=C LC_CTYPE=English_United States.1252
```

```
[3] LC_MONETARY=English_United States.1252 LC_NUMERIC=C
```

```
[5] LC_TIME=English_United States.1252
```

```
attached base packages:
```

```
[1] parallel stats4 stats graphics grDevices utils datasets methods
```

```
[9] base
```

```
other attached packages:
```

```
[1] G0.db_3.1.2 org.Hs.eg.db_3.1.2 AnnotationDbi_1.30.0
```

```
[4] GenomeInfoDb_1.4.0 IRanges_2.2.0 S4Vectors_0.6.0
```

```
[7] Biobase_2.28.0 BiocGenerics_0.14.0 edgeR_3.10.0
```

```
[10] limma_3.24.0 goseq_1.20.0 RSQLite_1.0.0
```

```
[13] DBI_0.3.1 geneLenDataBase_1.3.2 BiasedUrn_1.06.1
```



loaded via a namespace (and not attached):

[1] XVector_0.8.0	GenomicRanges_1.20.0	zlibbioc_1.14.0
[4] GenomicAlignments_1.4.0	BiocParallel_1.2.0	lattice_0.20-31
[7] tools_3.2.0	grid_3.2.0	nlme_3.1-120
[10] mgcv_1.8-6	lambda.r_1.1.7	futile.logger_1.4
[13] Matrix_1.2-0	rtracklayer_1.28.0	futile.options_1.0.0
[16] bitops_1.0-6	RCurl_1.95-4.5	biomaRt_2.24.0
[19] GenomicFeatures_1.20.0	Biostrings_2.36.0	Rsamtools_1.20.0
[22] XML_3.98-1.1		

## 8 Acknowledgments

Christopher Fjell for a series of bug fixes and pointing out the difference between the egGO and egGO2ALLEGS objects in the organism packages.

## References

- Y. Benjamini and Y. Hochberg. Controlling the false discovery rate: a practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society: Series B*, 57:289–300, 1995.
- Hairi Li, Michael T Lovci, Young-Soo Kwon, Michael G Rosenfeld, Xiang-Dong Fu, and Gene W Yeo. Determination of tag density required for digital transcriptome analysis: application to an androgen-sensitive prostate cancer model. *Proc Natl Acad Sci USA*, 105(51):20179–84, Dec 2008. doi: 10.1073/pnas.0807121105.
- Alicia Oshlack and Matthew J Wakefield. Transcript length bias in RNA-seq data confounds systems biology. *Biol Direct*, 4:14, Jan 2009. doi: 10.1186/1745-6150-4-14.
- M. D. Robinson and G. K. Smyth. Moderated statistical tests for assessing differences in tag abundance. *Bioinformatics*, 23(21):2881–2887, 2007.
- M. D. Robinson and G. K. Smyth. Small-sample estimation of negative binomial dispersion, with applications to sage data. *Biostatistics*, 9(2):321–332, 2008.
- M. D. Robinson, D. J. McCarthy, and G. K. Smyth. edgeR: a bioconductor package for differential expression analysis of digital gene expression data. *Bioinformatics*, 26(1):139–40, Jan 2010. doi: 10.1093/bioinformatics/btp616.
- M. D. Young, M. J. Wakefield, G. K. Smyth, and A. Oshlack. Gene ontology analysis for RNA-seq: accounting for selection bias. *Genome Biology*, 11:R14, Feb 2010.